





A Skellerup Industries Company

# Expandable edged Dekstrip® Flashing




Large round or square  
penetrations




Skylights



Bullnose



Valleys




Box Gutters

## Dekstrip® forms and stretches to solve all those flashing problems!

Dekstrip® expandable-edge flashing is the answer to flashing large, curved or awkward profiles and penetrations. It's ideal for square ducts, chimneys and skylights and is the fast, easy and most effective way to flash a bullnose.

### CHECK THE BENEFITS!

- ✓ Flashes hi-rib & standing seam profiles
- ✓ Stretch and form to fit and seal
- ✓ Flash between dissimilar materials
- ✓ Handles vibration and expansion
- ✓ Twenty year warranty  
Just fit it and forget it – we've got you covered

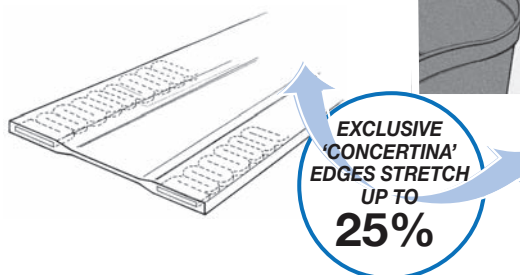

FS 52067  
QUALITY ISO9001  
AS/NZS 4347

[www.deks.com.au](http://www.deks.com.au)





A Skellerup Industries Company

# Dekstrip® Flashing

## Easy to fix


### Square Ducts, Chimneys, Skylights

Expand one edge and use separate strips, lapped and joined, to seal around the penetration.




### Large Round Pipes

Flash round pipes in one go, stretching the lower edge to fit. Join using fasteners, sealant and/or heat gun.




### Expansion Joints

The flexibility of Dekstrip® makes it ideal for joining box guttering. Ezi-strip is required for installation. (Code EZISTRIP)




### Flash Dissimilar Materials



Dekstrip® is compatible with most materials and can successfully flash between:

- Brick
- Fibre Cement
- Galvanised Steel
- Aluminium
- Stainless Steel
- Concrete

### Flash Dissimilar Roof Profiles



When flashing dissimilar roof profiles such as a house roof to a verandah, install as follows:

1. Junction gap should be no more than 180mm.
2. Measure length.
3. Stretch to suit profile on both sides.
4. When satisfied with the shape and fit and there are no stress lines, seal with Butyl Mastic Sealant then screw/rivet fix in the valley/pan of the profile.

Code No	Length	Width
DS23-180	23m or 75'	180mm or 7"
DS23-235	23m or 75'	235mm or 9"
DS23-305	23m or 75'	305mm or 12"
DS15-450	15m or 49'	450mm or 17"
DS10-180	10m or 32'	180mm or 7"
DS10-235	10m or 32'	235mm or 9"
DS10-305	10m or 32'	305mm or 12"
DS10-305	3.1m or 10'	235mm or 9"

#### Colour

GREY  
Thermoplastic  
Elastomiser  
will withstand  
temperatures  
of up to  
120°C / 248°F

Separate strip of aluminium included in all boxes.  
Go to [www.deks.com.au](http://www.deks.com.au) for more detailed installation instructions.

### Sealant

Because of the unique properties of TPE, Deks recommends Butyl Mastic as a sealant in all applications.

### Paint to Match Roof

After installation, and preferably after a period of 'weathering', Dekstrip® can be painted with any good quality 100% acrylic paint after priming with an epoxy resin-based primer.

# www.deks.com.au