S-5!®

The Right Way!

1

2

3

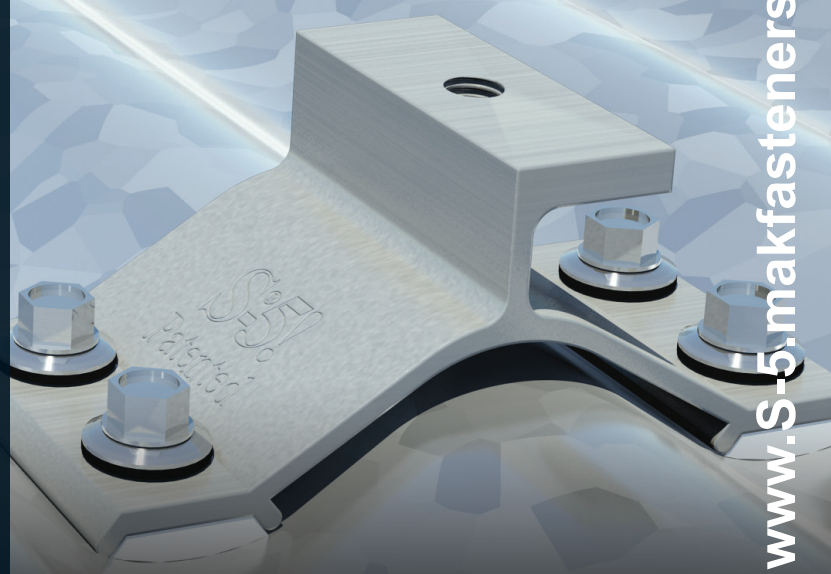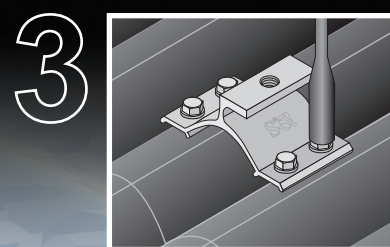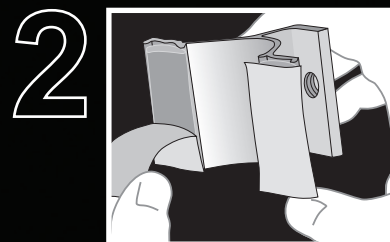### CorruBracket-AU™

CorruBracket-AU™ is designed specifically for the Australian market and is compatible with 16-18mm corrugated roofing profiles. The CorruBracket-AU comes with factory-applied butyl sealant already in the base, and the S-5!® patented reservoir conceals the sealant from UV exposure, preventing drying and cracks.

Installation is simple! CorruBracket-AU is mounted directly into the supporting structure of the roof, i.e. roof decking, wood or steel purlins, or trusses. No surface preparation is necessary; simply wipe away excess oils and debris, peel the release paper, align, and apply. Secure through the pre-punched holes using the appropriate screws for the supporting structure. No messy sealants to apply! No chance for leaks!

CorruBracket-AU works with multiple applications, including PV arrays, satellite dishes, signs, banners, and lightening protection. CorruBracket-AU is economical and facilitates quick and easy installation.

S-5!® CorruBracket-AU™ is the right way to attach almost anything to 16-18mm corrugated roofing; including PV through DirectAttached™ or Rail methods.

The right way to attach almost anything to metal roofs!
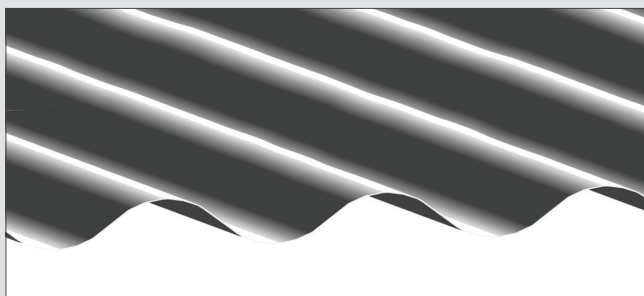
+353 (0)1-4519900 | www.S-5-makfasteners.com

CorruBracket-AU™ is extremely versatile. It can be used for almost any attachment need on 16-18mm corrugated metal roofing. No messy sealants to apply. The factory-applied butyl sealant waterproofs and makes installation a snap!
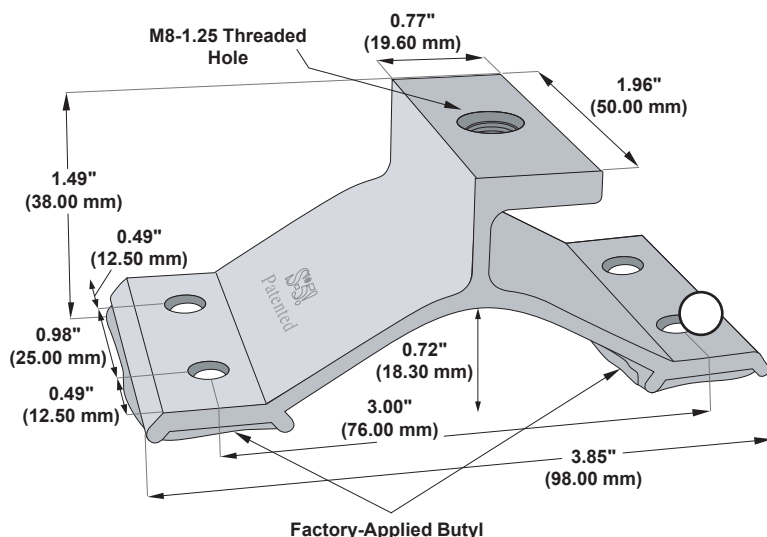
Each **CorruBracket-AU™** comes with factory-applied butyl sealant in the base. CorruBracket-AU is compatible with most common metal roofing materials. Please visit **www.S-5.com** for more information including CAD details, metallurgical compatibilities and specifications.

The CorruBracket-AU has been tested for load-to-failure results on wood decking, and metal and wood purlins. The independent lab test data found at www.S-5.com can be used for load-critical designs and applications. S-5!® holding strength is unmatched in the industry.

CorruBracket - AU™
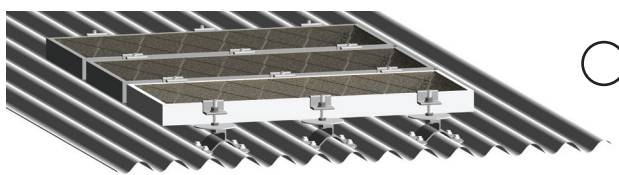
M8-1.25 Threaded Hole

0.77" (19.60 mm)

1.96" (50.00 mm)

1.49" (38.00 mm)

0.49" (12.50 mm)

0.98" (25.00 mm)

0.49" (12.50 mm)

0.72" (18.30 mm)

3.00" (76.00 mm)

3.85" (98.00 mm)

Factory-Applied Butyl

Please note: All measurements are rounded to the second decimal place. Contact your distributor for information about hardware requirements.

Example Profile

Example Application

S-5-PV Kit (DirectAttached™ or Rail)

www.S-5.makfasteners.com
+353 (0)1-4519900

Distributed by

MAK FASTENER SPECIALISTS LTD