


**MAK Dublin:**  
Tel: 01-4519900 / Fax: 01-4519004  
E-Mail: sales@makfasteners.com


**MAK (NI):**  
Tel: 028-867 58574 / Fax: 028-867 58578  
E-Mail: salesni@makfasteners.com

**MAK Cork:**  
Tel: 021-4342890 / Fax: 021-4342396  
E-Mail: corksales@makfasteners.com

**MAK (UK):**  
Tel: 0161-865 8562 Fax: 0161-866 9963  
E-Mail: uksales@makfasteners.com

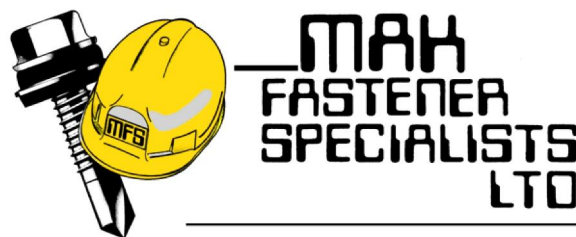

**FAST. SAFE. EASY.**

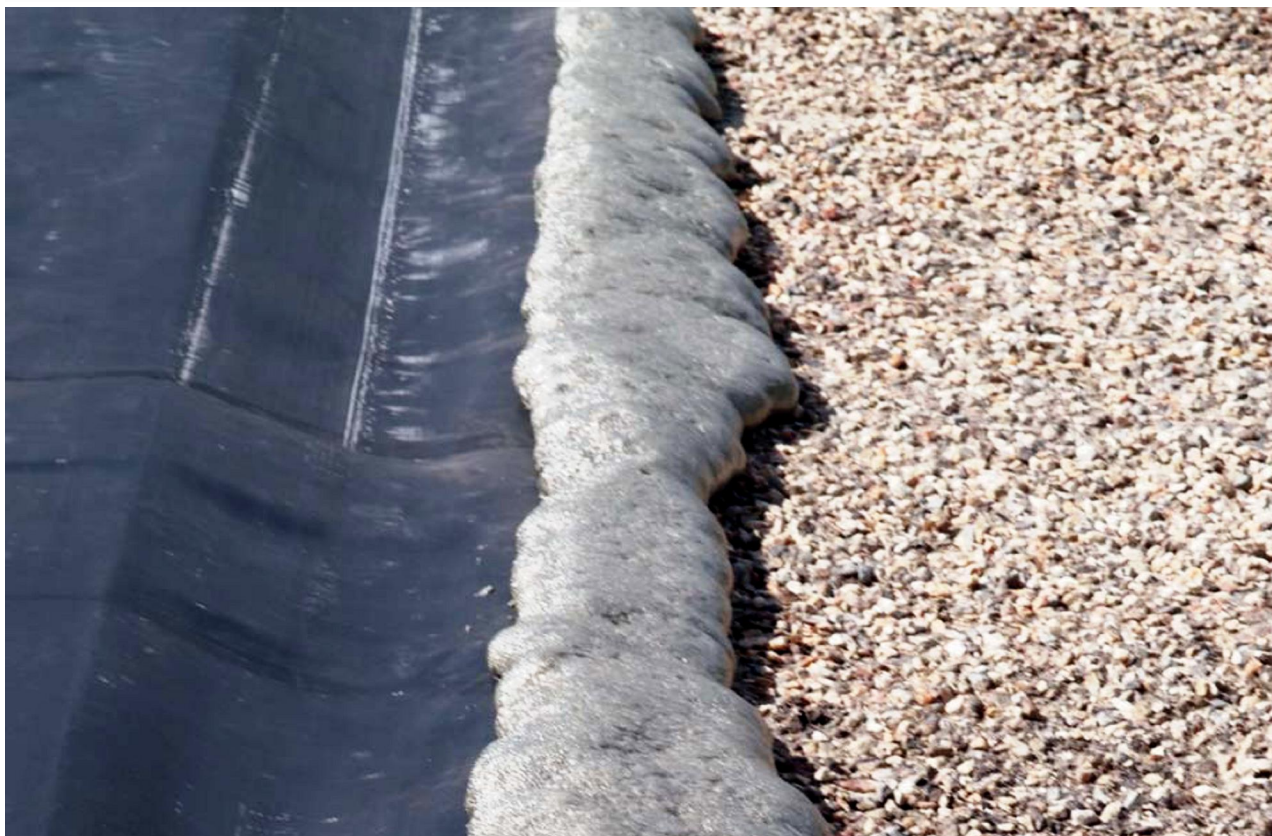

## Product Description

OlyBond NightShot is a fast acting, dual-component, low-rise polyurethane foam designed to form a temporary seal between new roof covers and existing roof systems. NightShot is dispensed through a portable 1:1 applicator and will adhere to TPO, EPDM, PVC, Built-up, and Modified Bitumen roof systems.

## Application

OlyBond NightShot is applied in a single band on the old roof surface at the intersection of the new roof system. The NightShot must be allowed to rise prior to pressing the new roof membrane into the foam. Care must be taken to insure that the new membrane is in full contact with the NightShot and that there are no voids or fishmouths along the edge of the membrane. Contaminated membrane and NightShot must be cut away prior to continuing with the application of the new roof. NightShot must be kept at room temperature and must not be applied when the deck temperature is below 4° C. Roof Surface must be clean, dry, and free of all loose gravel and dirt.

## Coverage

Each cartridge covers approximately 23-38 linear meters of tie-in.

